


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	04/19/03	B.Puchaski

DESCRIPTION	MATERIAL	FINISH
CENTER PIN	BRASS	GOLD
BODY-1	BRASS	NICKEL
BODY-2	BRASS	NICKEL
RETAINING RING	BRASS	NICKEL
GASKET	RUBBER	---
INSULATOR	PTFE	---

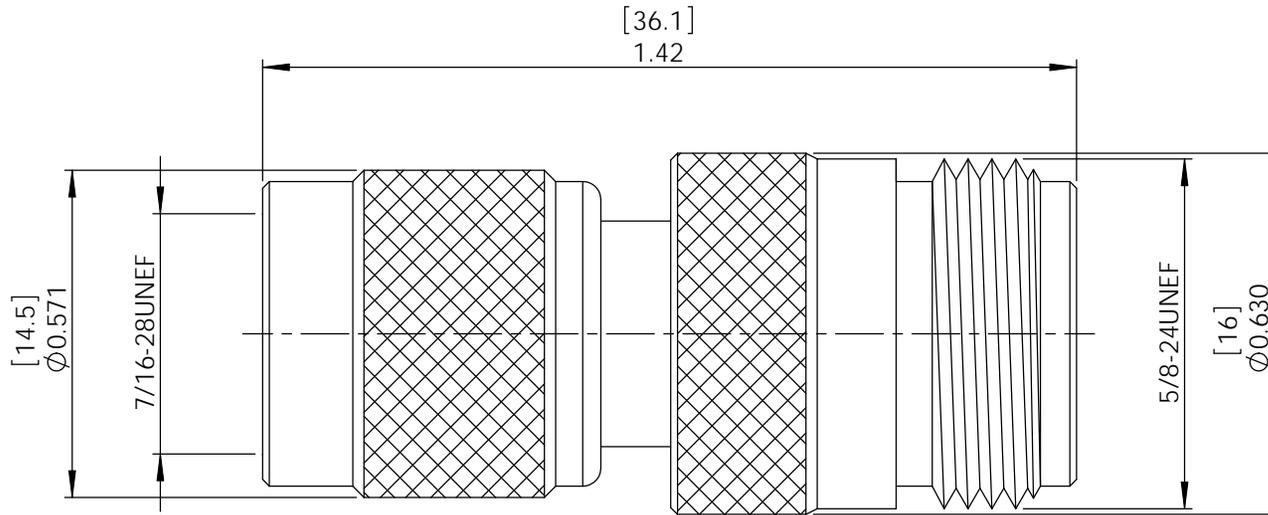

**NOTES:**

**ELECTRICAL:**

IMPEDENCE: 50 OHMS  
 VOLTAGE RATING: 500 VOLTS PEAK  
 WITHSTAND VOLTAGE: 1000V  
 FREQUENCY RANGE: DC~11 GHz  
 INSERTION LOSS: .15 dB MAX

**MISCELLANEOUS:**

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**RoHS Compliant**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005  ANGULAR TOLERANCES: ALL = ± 1°  PROJECTION	APPROVALS DRAWN BY <b>B.Puchaski</b>	DATE 03/19/10		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY <b>M.Audas</b>	DATE 04/19/10			CATEGORY <b>CONNECTOR</b>
	APPROVED BY <b>M.Audas</b>	DATE 04/19/10	PRODUCT DESCRIPTION <b>N-Female To RP-TNC Plug Adapter</b>		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY  COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>AXA-NFRTP</b>	REV. <b>A</b>

SCALE: NONE CAD FILE: AXA-NFRTP.SLDDRW SHEET 1 OF 1