


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/02/05	P.PESA
B	ECN 5452: REODRAWN AND NEW FORMAT, ADDED NOTES	4/19/11	D.FRISIELLO
C	ECN 8747: 29.75 WAS 25.1, 16.5 WAS 16.0, PTFE WAS TFE	5/4/2017	R.CLARK

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL
PIN	BRASS	GOLD
INSULATION	PTFE	-
END CAP	BRASS	NICKEL
FERRULE	BRASS	NICKEL

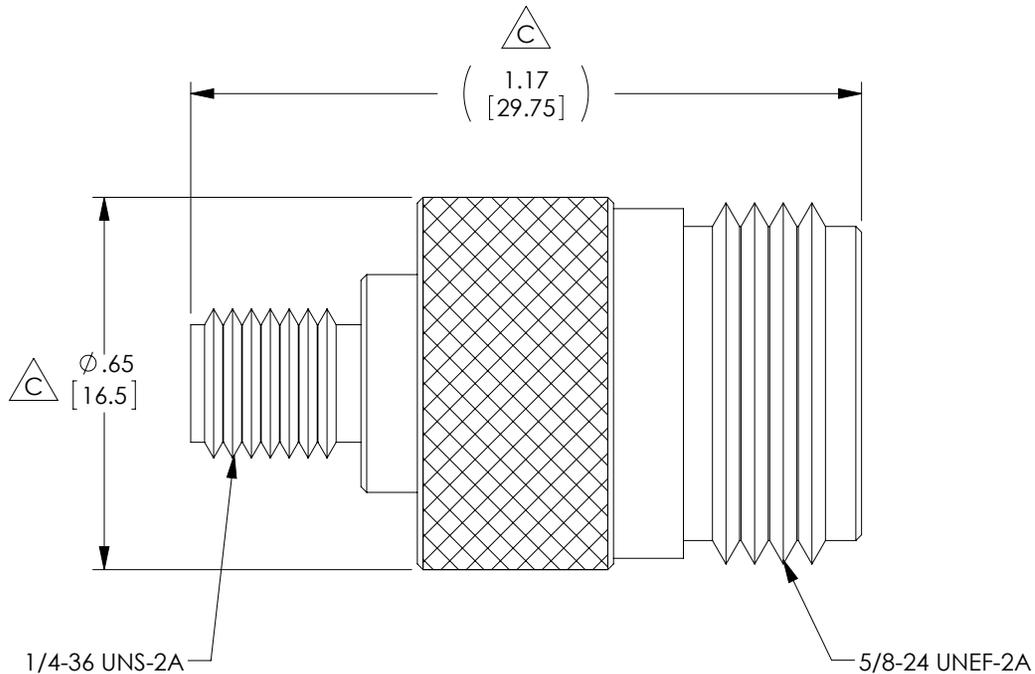

NOTES:

ELECTRICAL:  
 IMPEDANCE: 50 OHM  
 FREQUENCY RANGE: DC ~ 6 GHz  
 VOLTAGE RATING: 500 VOLTS PEAK  
 DIELECTRIC VOLTAGE WITHSTANDING: 1000 VOLTS RMS

PACKAGING:  
 COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**RoHS Compliant** ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY JC	DATE 03/02/05		50 HIGH STREET NORTH ANDOVER, MA 01845		
	CHECKED BY JC	DATE 03/02/05		CATEGORY		
	APPROVED BY P.PESA	DATE 03/02/05	PRODUCT DESCRIPTION <b>N-FEMALE TO SMA FEMALE ADAPTER</b>			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>AXA-NFSF</b>